



- The Vandercook SP15 is an extremely versatile repro press because of its many standard features and additional optional equipment that make it ideal for many proofing and printing needs.
- The SP15 is a compact machine taking up only 5'9" x 2'8" over-all floor space, but can handle sheets up to 14\% x 20".
- This economical press with its flexibility for a wide variety of operations makes it the best test press value on the market.
- The SP15 is engineered to the same rigid standards as all equipment bearing the Vandercook name.




Power Ink Distribution and Automatic Washup . . .

Combination power inking and automatic washup saves time and rollers.




**Ink Monitor . . . (optional equipment)**Accurately and continuously measures amount of ink in inking system. Enables operator to maintain color uniformity.

# THE VANDERCOOK SP15 INCLUDES THESE SPECIAL FEATURES




Tympan Guide . . .

The tympan guide provides for fast and easy packing changes.




**Foot Operated Gripper Bar...**Provides positive gripping for wide range of sheet sizes.



**Sheet Guide Adjustment Knobs..**Micrometer-type, wider knobs for easier turning, more accurate operation.



**Quick Change Form Rollers...**Integrated construction of nylon bearings and height adjustment permits rollers to be changed in seconds.




**Curved Plastic Cover...**For protection against inking system contamination.



Form Roller Support System . . . Form roller contact is controlled by the press bed bearers for the most exacting requirements.

#### ECONOMICAL USE OF FLOOR SPACE

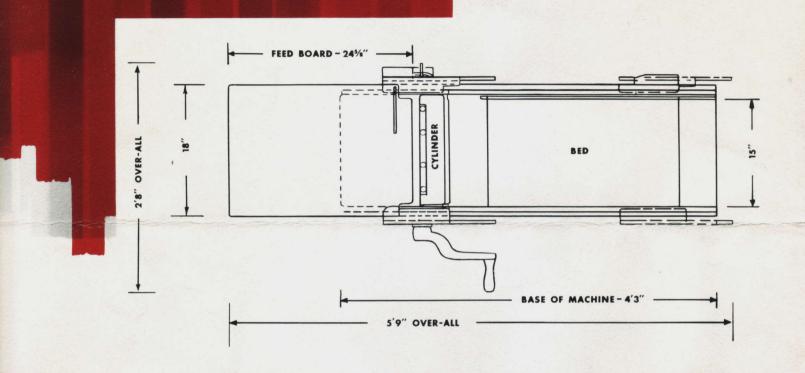

### SPECIFICATIONS

Bed size 15" x 311/2" . . . Maximum Sheet 143/4" x 20" . . . Maximum form 14" x 18" . . . Height of Feed Board 41" . . . Floor Space, including all overhanging parts, 2'8" x 5'9" ... Net Weight 705 Lbs.... Crated Weight 855 Lbs. . . . Packed for Export 1040 Lbs., 47 cu. ft. . . . Machine Tool Gray Finish.

#### STANDARD EQUIPMENT

Power Ink Distribution and Automatic Washup, furnished with 1/12 h.p. 115 volts. 60 cycles, single phase A.C. motor . . . Bearer Controlled Form Roller Support System (pat-

ent pending) . . . Two 21/2" Vandercook Form Rollers . . . Steel Vibrator and Steel Rider Roller which automatically separate from form rollers when inking system is tripped (patented) . . . Curved Plastic Cover for inking system . . . Foot Operated Gripper Bar, with five grippers and four micrometer end sheet guides . . . Side Guide . . . Tympan Guide (patent pending) . . . Steel Paper Cabinet with Four Shelves 141/2" x 18", mounted under feed board . . . Steel Cabinet under bed equipped with doors on lower shelves ... Brackets for storing two form rollers on open shelf in cabinet . . . Vandercook Roller Setting Gauge ... 040" Hard Cylinder Packing ... 25 Die Cut Drawsheets ... 25 Die Cut

Undersheets . . . Head Dead Line Bar . . . Foot Lockup Bar . . . Tools.

### **OPTIONAL EQUIPMENT**

Mobile Utility Cabinet . . . Illuminated Magnifier . . . Pressure Ink Well, with one pound Vandercook ink . . . Positive Lockup Bar . . . \*Special .968" Bed with Galley Thickness Bed Plate . . . \*Special Cylinder, undercut to .070" . . . \*Center Side Guide, not adjustable (for laboratory testing) . . . Ink Monitor . . . Extra Set Vandercook Form Rollers with nylon bearings, Adjusting Knobs and Driving Gear... Split Vibrator and Split Rider (for laboratory testing)...Counter...Dust cover. \*Available only when ordered with press.

Vandercook offers special proofing supplies to obtain maximum quality on Vandercook equipment: Repro Papers, Repro Inks, Replacement Inking Rollers, Roller-Blanket Conditioner, Tympan Paper, Frisket Paper, and Blankets.



## VANDERCOOK

DIVISION OF ILLINOIS TOOL WORKS INC.

Sales/Service

Chicago, III. 60645 3601 W. Touhy Ave. 312/761-2100 Fairfield, N.J. 07006 387 Passaic Ave. 201/226-7515

Los Angeles, Calif. 90057 2411 W. 8th Ave. 213/388-9931